



Cleveland State University
EngagedScholarship@CSU

Mechanical Engineering Faculty Publications

Mechanical Engineering Department

4-2005

Damage Assessment of Aerospace Structural Components by Impedance Based Health Monitoring

Andrew L. Gyekenyesi

Ohio Aerospace Institute, Andrew.L.Gyekenyesi@grc.nasa.gov

Richard Martin

Cleveland State University, r.e.martin01@csuohio.edu

Jerzy T. Sawicki

Cleveland State University, j.sawicki@csuohio.edu

George Y. Baaklini

NASA Glenn Research Center, George.Y.Baaklini@grc.nasa.gov

Follow this and additional works at: https://engagedscholarship.csuohio.edu/enme_facpub


 Part of the [Mechanical Engineering Commons](#)

[How does access to this work benefit you? Let us know!](#)

Original Citation

Gyekenyesi A., Martin R., Sawicki J., and Baaklini G., "Damage Assessment of Aerospace Structural Components by Impedance Based Health Monitoring," NASA TM- 2005-213579.

This Report is brought to you for free and open access by the Mechanical Engineering Department at EngagedScholarship@CSU. It has been accepted for inclusion in Mechanical Engineering Faculty Publications by an authorized administrator of EngagedScholarship@CSU. For more information, please contact library.es@csuohio.edu.



Damage Assessment of Aerospace Structural Components by Impedance Based Health Monitoring

Andrew L. Gyekenyesi
Ohio Aerospace Institute, Brook Park, Ohio

Richard E. Martin and Jerzy T. Sawicki
Cleveland State University, Cleveland, Ohio

George Y. Baaklini
Glenn Research Center, Cleveland, Ohio

The NASA STI Program Office . . . in Profile

Since its founding, NASA has been dedicated to the advancement of aeronautics and space science. The NASA Scientific and Technical Information (STI) Program Office plays a key part in helping NASA maintain this important role.

The NASA STI Program Office is operated by Langley Research Center, the Lead Center for NASA's scientific and technical information. The NASA STI Program Office provides access to the NASA STI Database, the largest collection of aeronautical and space science STI in the world. The Program Office is also NASA's institutional mechanism for disseminating the results of its research and development activities. These results are published by NASA in the NASA STI Report Series, which includes the following report types:


- **TECHNICAL PUBLICATION.** Reports of completed research or a major significant phase of research that present the results of NASA programs and include extensive data or theoretical analysis. Includes compilations of significant scientific and technical data and information deemed to be of continuing reference value. NASA's counterpart of peer-reviewed formal professional papers but has less stringent limitations on manuscript length and extent of graphic presentations.
- **TECHNICAL MEMORANDUM.** Scientific and technical findings that are preliminary or of specialized interest, e.g., quick release reports, working papers, and bibliographies that contain minimal annotation. Does not contain extensive analysis.
- **CONTRACTOR REPORT.** Scientific and technical findings by NASA-sponsored contractors and grantees.

- **CONFERENCE PUBLICATION.** Collected papers from scientific and technical conferences, symposia, seminars, or other meetings sponsored or cosponsored by NASA.
- **SPECIAL PUBLICATION.** Scientific, technical, or historical information from NASA programs, projects, and missions, often concerned with subjects having substantial public interest.
- **TECHNICAL TRANSLATION.** English-language translations of foreign scientific and technical material pertinent to NASA's mission.

Specialized services that complement the STI Program Office's diverse offerings include creating custom thesauri, building customized databases, organizing and publishing research results . . . even providing videos.

For more information about the NASA STI Program Office, see the following:

- Access the NASA STI Program Home Page at <http://www.sti.nasa.gov>
- E-mail your question via the Internet to help@sti.nasa.gov
- Fax your question to the NASA Access Help Desk at 301-621-0134
- Telephone the NASA Access Help Desk at 301-621-0390
- Write to:
NASA Access Help Desk
NASA Center for AeroSpace Information
7121 Standard Drive
Hanover, MD 21076



Damage Assessment of Aerospace Structural Components by Impedance Based Health Monitoring

Andrew L. Gyekenyesi
Ohio Aerospace Institute, Brook Park, Ohio

Richard E. Martin and Jerzy T. Sawicki
Cleveland State University, Cleveland, Ohio

George Y. Baaklini
Glenn Research Center, Cleveland, Ohio

National Aeronautics and
Space Administration

Glenn Research Center

This report contains preliminary findings, subject to revision as analysis proceeds.

Available from

NASA Center for Aerospace Information
7121 Standard Drive
Hanover, MD 21076

National Technical Information Service
5285 Port Royal Road
Springfield, VA 22100

Available electronically at <http://gltrs.grc.nasa.gov>

Damage Assessment of Aerospace Structural Components by Impedance Based Health Monitoring

Andrew L. Gyekenyesi
Ohio Aerospace Institute
Brook Park, Ohio 44142

Richard E. Martin and Jerzy T. Sawicki
Cleveland State University
Cleveland, Ohio 44115

George Y. Baaklini
National Aeronautics and Space Administration
Glenn Research Center
Cleveland, Ohio 44135

Abstract

This paper addresses recent efforts at the NASA Glenn Research Center at Lewis Field relating to the set-up and assessment of electro-mechanical (E/M) impedance based structural health monitoring. The overall aim is the application of the impedance based technique to aeronautic and space based structural components. As initial steps, a laboratory was created, software written, and experiments conducted on aluminum plates in undamaged and damaged states. A simulated crack, in the form of a narrow notch at various locations, was analyzed using piezoelectric-ceramic (PZT: lead, zirconate, titarate) patches as impedance measuring transducers. Descriptions of the impedance quantifying hardware and software are provided as well as experimental results. In summary, an impedance based health monitoring system was assembled and tested. The preliminary data showed that the impedance based technique was successful in recognizing the damage state of notched aluminum plates.

1. Introduction

Structural health monitoring (SHM) is an essential element of modern structural components. The idea of equipping structures with sensors and actuators in an attempt to impart “smartness” has great potential for establishing a cost effective, in-situ maintenance routine (Bhalla and Soh 2004). This is especially true for critical high performance, aerospace components where accessibility using traditional nondestructive evaluation techniques is limited (e.g., turbine propulsion components) or even impossible (e.g., long duration space exploration vehicles). Some examples of manual and time consuming nondestructive evaluation techniques (NDE), which are typically utilized off-wing in the aerospace industry, include eddy current, ultrasonic, fluorescent penetrant, magnetic particle, optical, and radiographic inspection (Winston et al. 2001). Regarding the cost effectiveness of reduced manual inspections, it is estimated that nearly 27 percent of an aircraft’s life cycle cost is spent on inspections and repairs (Kessler et al. 2002). With an on-line, self actuated system such costs can be dramatically reduced. Furthermore, the impact of such an in-situ SHM system is that it not only increases safety and performance, but also enables converting schedule based into condition based maintenance, thus reducing both down time and costs (Bray and Roderick 1989).

The impedance based approach has demonstrated unique features that meet the requirements of an on-line SHM system. This form of structural health monitoring is based on the use of a sensor/actuator patch to obtain real-time and continuous measurements that reflect the health status of the monitored structure. This paper describes the development of an impedance based SHM system from hardware acquisition, to software development, to procedural methodology and, lastly, experimentation using undamaged and damaged aluminum plates.

2. Impedance Based Structural Health Monitoring

2.1 Theory

Impedance-based SHM uses piezoelectric (PZT: lead, zirconate, titarate) patches that are bonded onto or embedded in a structure. Each individual patch behaves as both an actuator of the surrounding structural area as well as a sensor of the structural response. The size of the excited area varies with the geometry and material composition of the structure. When a PZT material is subjected to an electric field it produces a mechanical strain, and when stressed it produces an electrical charge. For a PZT patch intimately bonded to a structure, driving the patch with a sinusoidal voltage sweep, for example, deforms and vibrates the structure. This is due to the patch applying a strain parallel to the structure's surface. In reaction to these elastic wave inputs, the structure produces a localized dynamic response. This dynamic response is transferred back to the PZT patch, which sequentially produces an electrical response that is analyzed in regard to the impedance behavior (Peairs et al. 2004). The structure's mechanical impedance is presented in the classical formulation as

$$Z_{str}(\omega) = i\omega m_e(\omega) + c_e(\omega) - ik_e(\omega)/\omega \quad (1)$$

The terms m_e , k_e , and c_e represent the structure's mass, stiffness, and damping coefficients while ω represents frequency. Due to mechanical coupling between the sensor and the host structure, this mechanical effect is picked up by the sensor and, through electro-mechanical coupling inside the active element, is reflected in the electrical impedance measured at the sensor's terminals. Figure 1 illustrates the basic concept (Giurgiutiu et al. 1998).

Solving the wave equation for the system shown in figure 1 yields the total impedance as measured by the PZT sensor, $Z(\omega)$, which contains both the structure's $Z_{str}(\omega)$ and the sensor's $Z_{PZT}(\omega)$ impedances:

$$Z(\omega) = \left[i\omega C \left(1 - \kappa_{31}^2 \frac{Z_{str}(\omega)}{Z_{str}(\omega) + Z_{PZT}(\omega)} \right) \right]^{-1} \quad (2)$$

The term C denotes the zero-load capacitance, and κ_{31} represents the coupling coefficient of the piezoelectric active sensor for in-plane vibration. At this point in time, the impedance based health monitoring technique is typically utilized as an empirical before-and-after tool that identifies changes in the damage state by noting phase shifts or magnitude alterations in the measured impedance as compared to a base line measurement.

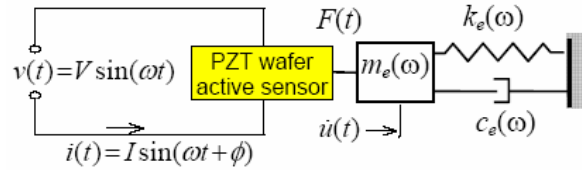


Figure 1.—Electro-mechanical coupling between the active sensor and the structure (Giurgiutiu et al. 1998).

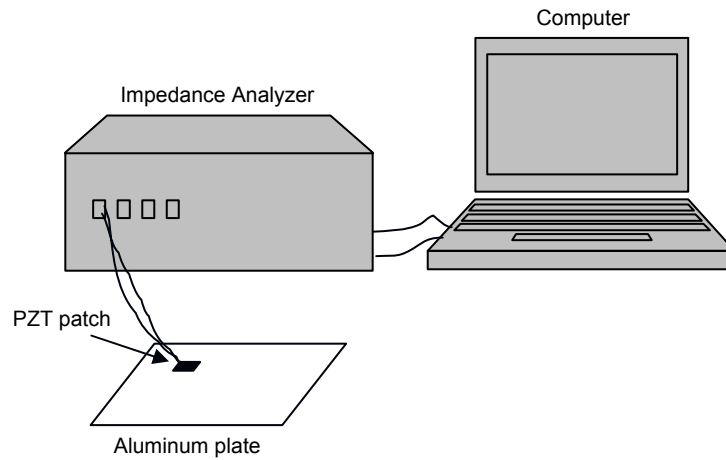


Figure 2.—Experimental setup.

2.2 Experimental Set-up

Figure 2 shows the experimental set-up utilized for capturing electromechanical (E/M) impedance data. The E/M impedance data were taken using an HP 4194A impedance analyzer connected to a computer via the GPIB interface. A custom software program was developed for control of the impedance analyzer functions as well as acquisition, processing and display of the collected data. Of particular importance was the ability to modify the frequency sweep range, step size, excitation voltage, and equivalent circuit mode (series or parallel) for a given test. For each test, impedance data were acquired at every discrete excitation frequency within the sweep. In this study, only the real portion of the impedance was collected and analyzed as this has been shown to be the most sensitive in regard to damage identification (see Kabeya 1998). Following data acquisition, the software provided functions for displaying collected data, averaging, performing damage metric calculations and exporting raw and reduced data.

2.3 Damage Metric

In order to quantify damage, a metric was employed that examines the change in the E/M impedance response in regard to the baseline condition. This damage metric, D , is expressed as

$$D = (1 - \rho)^2 \tag{3}$$

where,

$$\rho = \frac{\text{cov}(XY)}{\sigma(X)\sigma(Y)} \tag{4}$$

The term ρ represents the correlation coefficient concerning the baseline, (X), and damaged, (Y), E/M impedance responses. It is a function of the covariance, $\text{cov}(XY)$, and standard deviations, $\sigma(X)$ and $\sigma(Y)$, of the response values (Miller and Freund 1985). The damage metric will range from 0 for the undamaged case to 1 for fully damaged case (i.e., no correlation between the before-and-after impedance measurements). Similar approaches have been utilized in other studies (e.g., Giurgiutiu et al. 1998).

3. Experimental Procedure

A series of experiments on two, simple geometry specimens (thin-gage aluminum square plates) were conducted for assessing the potential of the impedance based health monitoring system. The plate specimens, each measuring 100×100-mm with a thickness of 1.5-mm, were made from 6061-T6 aluminum alloy sheet. Each plate was instrumented with one 10×10-mm PZT patch (material PSI-5A4E, thickness 0.19-mm attached using cyanoacrylate adhesive) purposely located at a vibration-sensitive location. This location was determined by conducting a finite element analysis focusing on the modal response of the plate and placing the patch in an area suspect to maximum displacements. After capturing baseline data for each of the undamaged plates, a single 10-mm straight, through-thickness EDM notch (0.3 mm width) was utilized to simulate a crack. The notch locations for each plate are shown in figure 3. As was the case for the patch placement, the notches were located in areas of maximum displacement as defined by the finite element analyses. During the experiments, the specimens were supported on foam to simulate free-free conditions.

Preliminary tests were conducted to determine the frequency range best suited for measuring the damage dependent changes in the impedance response. Impedance values were collected for 15 repetitions over a 20 to 200 kHz frequency range for each specimen in the undamaged state. The 15 repetitions were then averaged (i.e., a single impedance plot using the 15 repeats) and compared to one of the 15 samples (randomly chosen) from within the same data set. This was done for each of the two plates. The intent was to look for a frequency window that produced the best repeatability regarding the 15 measurements in the undamaged state by avoiding noisy frequency regions that lack consistency between measurements. To this end, the damage metric was calculated for a 10 kHz wide, sliding window starting at 20 kHz and ending at 200 kHz. The step size for the window and the accompanying damage calculation was 1 kHz.

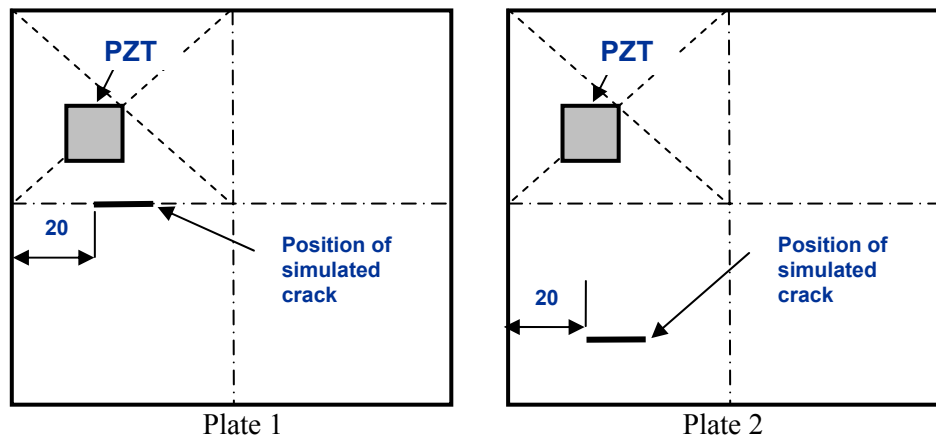


Figure 3.—Schematic of specimens with simulated cracks and PZT sensors.

4. Results

Figure 4 shows a plot of the damage metric versus the central frequency for the windowed region regarding the undamaged plates. As mentioned above, this procedure was done in order to search for frequency regions that offered good repeatability under constant conditions (i.e., undamaged case). It can be seen from this plot that the damage metric was consistently valued at zero from 20 kHz to approximately 45 kHz, meaning that the two plots correlate well in that frequency range. The damage metric, in regions of good repeatability, should be close to zero, since the material state was maintained (zero damage in this case). Beyond 45 kHz, however, there was a noticeable inconsistency regarding the damage parameter. Based on these results, a frequency range of 20 to 40 kHz was chosen for subsequent E/M impedance measurements.

Next, a comparison was made between the baseline of plate 1 and the baseline of plate 2. Figure 5 shows the E/M impedance plots as well as indicating the damage parameter value based on the correlation of the two plates (eq. (3)). Each of the impedance plots was an average of 15 repetitions. The damage metric ($D = 0.965$) indicated that there was much discrepancy between the two baseline measurements. As stated earlier, the large specimen to specimen variations dictate that the method be utilized as a comparison of baseline and subsequent measurements within the same specimen. Similar observations were made by Winston et al. 2001.

Figure 6 shows the results of comparing the baseline and the notched (i.e., damaged) cases for plate 1. The presence of the notch did modify the frequency response function. This was indicated by the shifting of the resonant frequencies and by the appearance of new resonances. The calculated correlation coefficient for this case was $\rho = 0.497$, and the damage metric was $D = 0.253$ based on eq. (3). Next, figure 7 shows the results for plate 2 comparing the undamaged baseline with the damaged case, again, calculated using 15 repetitions for each plot. The correlation coefficient for plate 2 was $\rho = 0.365$, and the damage metric was $D = 0.403$. Note that plate 2 before-and-after notch comparisons showed a larger damage metric as compared to the plate 1 case, even though the plate 2 notch was located farther from the PZT patch. At this point there is no explanation for this behavior, although, the uniqueness of the plate to plate behaviors probably plays a part. Furthermore, the changes in the E/M impedance could also be influenced by the notch location as it relates to the plate's vibration displacement response and node locations. Further research needs to be conducted concerning these results.

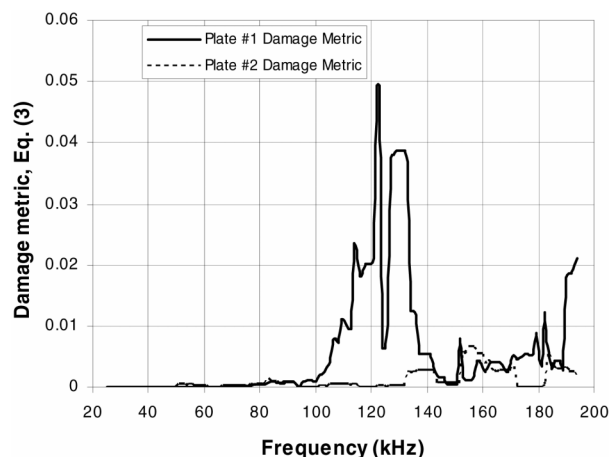


Figure 4.—Windowed correlation coefficient (20 to 200 kHz, 10 kHz window, 1 kHz step) for two uncracked plates.

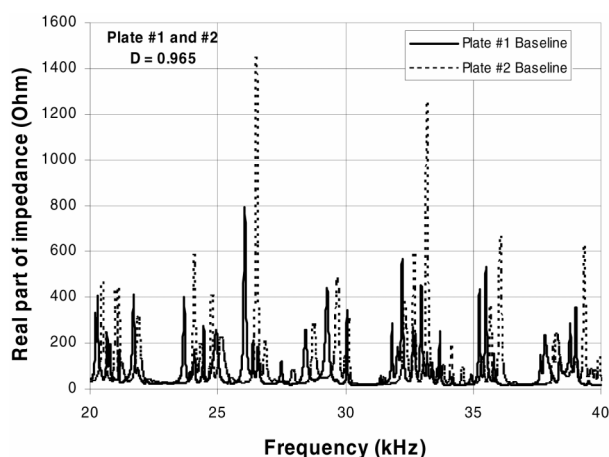


Figure 5.—Comparison of undamaged plates 1 and 2 (20 to 40 kHz). Damage metric, D , was 0.965 indicating a lack of correlation between the two plates.

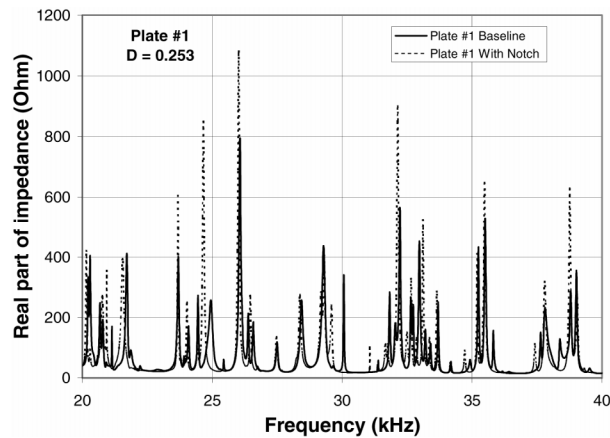


Figure 6.—Averaged E/M impedance results for plate 1 with and without a notch.

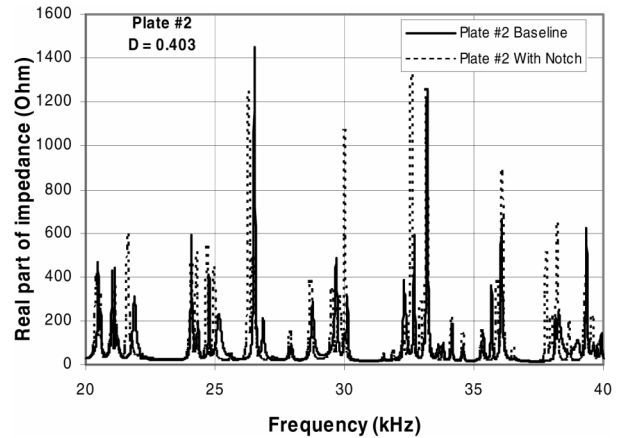


Figure 7.—Averaged E/M impedance results for plate 2 with and without a notch.

5. Conclusions

This study was conducted in order to establish an impedance based structural health monitoring laboratory, which included both the acquisition of hardware and the development of software, as well as conducting preliminary experiments on aluminum plates in undamaged and damaged states. In addition, a methodology was developed that defined the frequency range utilized for the E/M impedance measurements. This was based on finding frequency ranges that offered the best repeatability (i.e., lowest noise) as expressed by either a high correlation or low damage value. Next, simulated cracks, in the form of narrow notches, were analyzed using PZT patches as impedance measuring transducers. Conclusions from the experiments on the two aluminum plates were as follows: The assessment of the impedance behavior regarding the two undamaged plates indicated that variations between specimens overrode changes due to damage. Therefore, it was shown that the impedance method was best utilized as a comparison of baseline and subsequent measurements concerning the same specimen. Next, the E/M impedance measurements were able to recognize the changes between the undamaged and damaged (i.e., notched) cases for each plate, although, larger changes were observed for plate 2 even though the notch was located farther from the PZT patch as compared to plate 1. This may have been due the uniqueness of the plate to plate behaviors, as well as the influence of notch and patch locations as it relates to the plate's displacement response and node locations. Further research is needed regarding this observation.

With the establishment of the hardware and software as well as success concerning the preliminary experiments, the system will be further tuned to the various material systems (e.g., composites or thermal protection system materials) and structures that are of most interest to NASA. This includes the application of the technique to rotor components (either aero or space propulsion) by utilizing slip ring connections. In addition, in cooperation with the Virginia Polytechnic Institute and State University, research is being conducted regarding wireless and self powering applications especially relating to space exploration vehicles. Lastly, the same PZT patches can be utilized as ultrasonic transducers, thereby creating a layered health monitoring system that is permanently attached to a structure allowing for continuous feedback regarding system health.

References

- Bhalla, S. and Soh, C. K., "Structural Health Monitoring by Piezo-Impedance Transducers. I: Modeling," *Journal of Aerospace Engineering*, October 2004.
- Bray, D.E. and Roderick S.K., "Nondestructive Evaluation," McGraw-Hill, New York, 1989.
- Giurgiutiu, V., Reynolds, A., and Rogers, C.A., "Experimental Investigation of E/M Impedance Health Monitoring for Spot-Welded Structural Joints," *Journal of Intelligent Material Systems and Structures*, September 1998.
- Kabeya, K., "Structural Health Monitoring Using Multiple Piezoelectric Sensors and Actuators," Masters Thesis, Virginia Polytechnic Institute and State University, 1998.
- Kessler, S.S., Spearing, S.M., Atala, M.J., Cesnik, C.E.S., and Soutis, C., "Damage Detection in Composite Materials Using Frequency Response Methods," *Composites Part B*, vol. 33, 2002.
- Miller, I. and Freund, J.E., "Probability and Statistics for Engineers," Prentice Hall, Englewood Cliffs, New Jersey 1985.
- Peairs, D.M., Park, G., and Inman D.J., "Improving Accessibility of the Impedance-Based Structural Health Monitoring Method," *Journal of Intelligent Material Systems and Structures*, vol. 15, February 2004.
- Winston, H.A., Sun F., and Annigeri, B.S., "Structural Health Monitoring With Piezoelectric Active Sensors," *Journal of Engineering for Gas Turbines and Power*, vol. 123, April 2001.

REPORT DOCUMENTATION PAGE			<i>Form Approved</i> <i>OMB No. 0704-0188</i>	
Public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302, and to the Office of Management and Budget, Paperwork Reduction Project (0704-0188), Washington, DC 20503.				
1. AGENCY USE ONLY (Leave blank)		2. REPORT DATE April 2005	3. REPORT TYPE AND DATES COVERED Technical Memorandum	
4. TITLE AND SUBTITLE Damage Assessment of Aerospace Structural Components by Impedance Based Health Monitoring			5. FUNDING NUMBERS WBS-22-728-30-06	
6. AUTHOR(S) Andrew L. Gyekenyesi, Richard E. Martin, Jerzy T. Sawicki, and George Y. Baaklini				
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration John H. Glenn Research Center at Lewis Field Cleveland, Ohio 44135-3191			8. PERFORMING ORGANIZATION REPORT NUMBER E-15046	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) National Aeronautics and Space Administration Washington, DC 20546-0001			10. SPONSORING/MONITORING AGENCY REPORT NUMBER NASA TM-2005-213579	
11. SUPPLEMENTARY NOTES Andrew L. Gyekenyesi, Ohio Aerospace Institute, 22800 Cedar Point Road, Brook Park, Ohio 44142; Richard E. Martin, Cleveland State University, 1983 E. 24th Street, Cleveland, Ohio 44115-2440; Jerzy T. Sawicki, Department of Mechanical Engineering, Cleveland State University, 1983 E. 24th Street, Cleveland, Ohio 44115-2440; and George Y. Baaklini, NASA Glenn Research Center. Responsible person, Andrew L. Gyekenyesi, organization code RIO, 216-433-8155.				
12a. DISTRIBUTION/AVAILABILITY STATEMENT Unclassified - Unlimited Subject Categories: 39, 37, and 20 Available electronically at http://gltrs.grc.nasa.gov This publication is available from the NASA Center for AeroSpace Information, 301-621-0390.			12b. DISTRIBUTION CODE	
13. ABSTRACT (Maximum 200 words) This paper addresses recent efforts at the NASA Glenn Research Center at Lewis Field relating to the set-up and assessment of electro-mechanical (E/M) impedance based structural health monitoring. The overall aim is the application of the impedance based technique to aeronautic and space based structural components. As initial steps, a laboratory was created, software written, and experiments conducted on aluminum plates in undamaged and damaged states. A simulated crack, in the form of a narrow notch at various locations, was analyzed using piezoelectric-ceramic (PZT: lead, zirconate, titarate) patches as impedance measuring transducers. Descriptions of the impedance quantifying hardware and software are provided as well as experimental results. In summary, an impedance based health monitoring system was assembled and tested. The preliminary data showed that the impedance based technique was successful in recognizing the damage state of notched aluminum plates.				
14. SUBJECT TERMS Structural health monitoring; Piezoelectric patch; Cracks; Damage			15. NUMBER OF PAGES 13	
			16. PRICE CODE	
17. SECURITY CLASSIFICATION OF REPORT Unclassified	18. SECURITY CLASSIFICATION OF THIS PAGE Unclassified	19. SECURITY CLASSIFICATION OF ABSTRACT Unclassified	20. LIMITATION OF ABSTRACT	

